



swissmade 

Satelco Alarmdialer Professional


- 4 alarm inputs (digital) / 4 relay outputs
- Ethernet Interface 1 GBit
- With Sallegra Input Module expandable to 20 digital and 16 analogue inputs (0-10V DC)
- Alarm repetition
- Alarm acknowledgement
- Different day and night destinations

Highlights:

- Alarmierung via VOIP
- SDM Satelco SMS System
- Mail messages
- Day / night mode
- Remote control
- Remote maintenance / automatic updates

Technical data:	
Processor	Intel Atom E3825 Dual Core Processor with 1.33 GHz clock frequency
Operating system	Sallegra OS based on Fedora Linux
Power supply	12 V DC $\pm 20\%$ via 3-pole connection terminal
Current intake	Typ 550mA
Power recording	6.6 VA
Interfaces	
LAN	Gigabit Ethernet interface on a 8-pole FCC RJ-45 plug
Inputs	4x digital inputs, 12 V DC, drawing current, galvanically separated, LED display on terminal
Outputs	4x bistable relay outputs (NO / NC), 230 V AC / 16 A, galvanically separated, LED display on terminal
USB	2x USB 2.0 host interface on two-tier 4-pin. USB connector type A
Battery	Battery backup holder for CR1632 button cell
Memory	
External memory	MicroSD card up to 2GB, SDHC cards up to 32GB
Fixed memory	16 GB eMMC
Main memory	4 GB DDR3
Watchdog	Internal Hardware Monitoring device
Real Time Clock	Real time clock with battery backup
Configuration	Via internal Web Server
Dimensions	212 x 90 x 58 mm / 380 gr.

Protection class	IP20
Environmental specifications	
Operating temperature	0 °C – +55 °C
Storage temperature	0 °C – +70 °C
Humidity	10 – 90% (no condensation)
Conformity	CE
Mounting	DIN rail TS35, EN50022
Satelco Article number	11 610 Alarmdialer Pro
Order accessories separately	10124 Power supply 12V / 1 A
	10655 Battery module for UPS2
	10653 DIN rail power supply unit 13.8V
	11 593 Micro radar motion detector (direct connection)
	10403 Input Module for expanding the inputs up to 20x

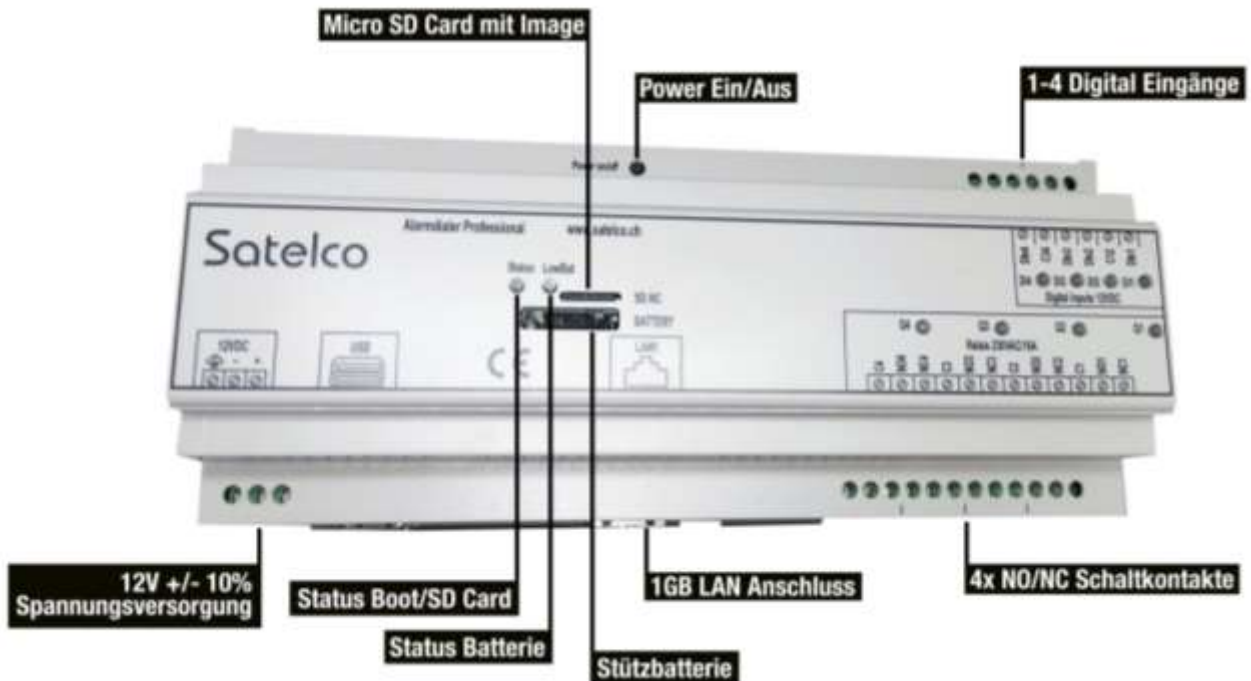

All specifications subject to change without notice or liability to provide changes to prior purchasers. Information and specifications published here are current as of the date of publication of this document. We reserve the right to change or modify specifications without prior notice. www.satelco.ch
 *Warranty ex works, normally 24 months, fixed at order. Information is current as of the date of publication. Subject to errors and modifications. NOTE: Internal connections refer to connections inside the unit, generally mounted across a pin-header. External connections refer to those outside the box. Once mounted, only connections described as „front accessible“ can be accessed by the customer.